


ARB100053471 ©2024 Horizon Hobby, LLC. ARMA RC is a trade name of Horizon Hobby Ltd. Horizon Hobby Ltd is a subsidiary of Horizon Hobby, LLC. All other trademarks, service marks and logos are property of their respective

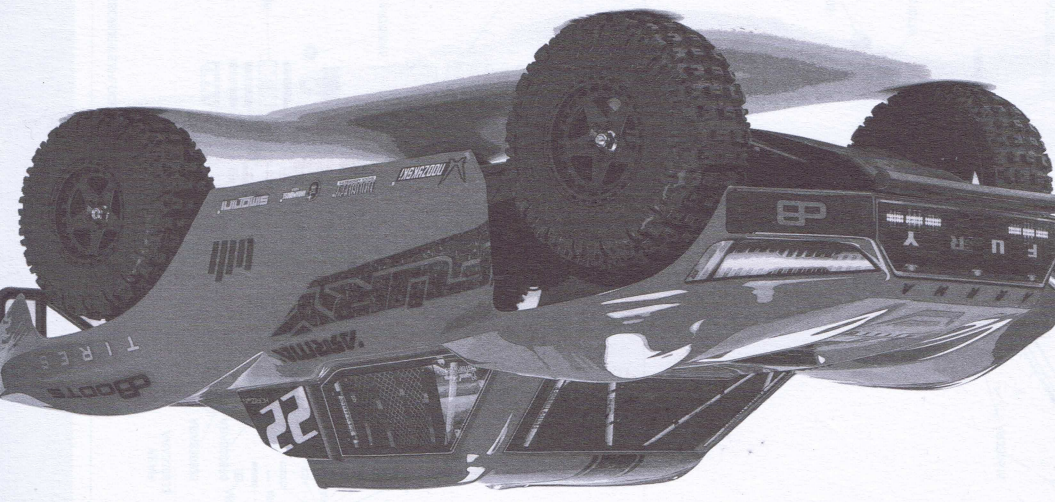

TECHNICAL PACK!
TECHNISCHES PACK!
PACK TECHNIQUE!

ARMA FURY

How To... Wie... Comment...

Set the Slipper Clutch. Stellt man die Rutschkupplung ein. Régliez de l'embrayage à glissement limité (Slipper)

Looser
Verlörere
Looser

Tighter
Enger
Plus serré

Hold Spur Gear
Stirnrad halten
Tenir l'engrenage droit

Factory Default Setting: 2.8mm
Factory Default-Einstellung: 2.8mm
Cadre Default d'usine: 2.8mm

2.8mm

3

2

1

How To... Wie... Comment...

Change the Pinion / Motor. Wechselt man das Motorritzel/den Motor. Changez le Pignon / Moteur.

2.0mm

1

2

3

4

5

Mesh-Safe Plates 13T-20T
Mesh-Safe-Platten 13T-20T
ARA-1760

Plaques grillagées 13T-20T

Select the size to match your pinion gear! Wählen Sie die Größe passend zu Ihrem Ritzel! Sélectionnez la taille adaptée à votre pignon!

6

M3x12mm Motor Button Head Screw (ARAC9801) x2
2.0mm

TIGHTEN!
SPANNEN!
SERRER!

2.0mm

7

8

M4x4mm Grub Screw (AR701404) x1
2.0mm

9